

Standard dimensions


Load / Capacity		Car			Lift shaft *									
Persons	Q Load	AC Width	FC Depth	PL Clear opening	Entrances		Side-opening doors		Central-opening doors		HF Pit	HUP Last Floor		
					Accessibility	No. of entrances	AH ¹ Width	FH ² Depth	AH Width	FH ³ Depth				
4	320 kg	825	1100	700		1	1325	1350	1600	1300	1000 (850) ⁴	3400		
						2 x 180 ⁰		1500		1400				
						2 x 90 ⁰	1450	1350						
6	450 kg	1000	1250	800		1	1500	1500	1800	1450				3400 (3000) ⁵
						2 x 180 ⁰		1650		1550				
						* ⁶	2 x 90 ⁰	1625	1500					3400
8	630 kg	1100	1400	900		1	1600	1650	2000	1600		3400 (3000) ⁵		
						2 x 180 ⁰		1800		1700				
						2 x 90 ⁰	1725	1650						
			* ⁶	1	1700	1500	2000	1450		3400				
			2 x 180 ⁰	1650		1550								
			2 x 90 ⁰	1825		1575								

- 1 Accessible space below the pit (counterweight with safety gear) add 50 mm to AH
- 2 Shaft depth with door tracks projecting 60 mm on the landing
- 3 Shaft depth with door tracks projecting 40 mm on the landing
- 4 HF reduced pit optional 850 mm


- 5 Minimum HUP for internal car height (HC) of 2100 mm (HUP = HC + 1,300)
HUP reduced headroom optional only for 6 and 8 persons (HUP = HC + 900)
 - 6 Adapted for persons with disabilities, according to European standard EN 81-70
- * Minimum plumb measurements

Layout


1 ENTRANCE




2 ENTRANCES (OPEN THROUGH)




2 ENTRANCES (FRONT & SIDE)



VERTICAL SECTION

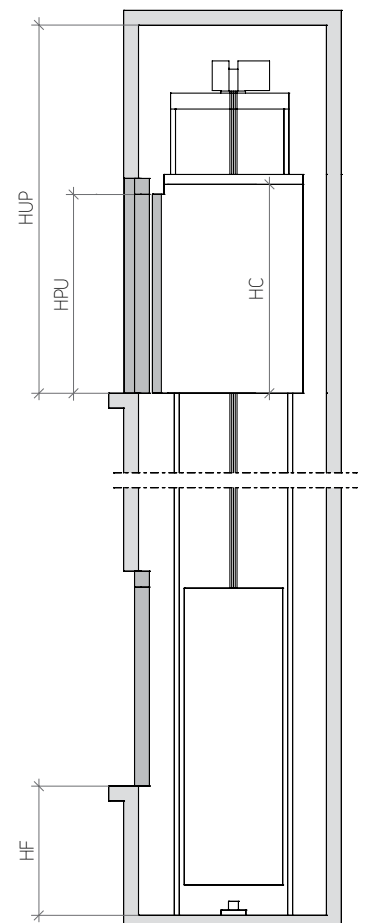

CONTROLLER DETAIL



WIDE-FRAMED DOOR DETAIL

